

We test, You produce

D620

HIGH SPEED COMPACT FLOW TESTER


After 45 years, and 150,000 testers installed in more than 5,000 customers worldwide, ATEQ presents its revolutionnary flow tester: **D620**.

New electronic module, new measurement module, new interface, new accessories... All has been made to improve your quality control.

And yet, inside can be found the latest leak testing technics and technology that will guarantee you the fastest and most accurate leak testing cycle on the market.

Highlights

- LARGE COLOR DISPLAY
- MAXIMUM PERFORMANCE
- MULTIPLE COMMUNICATION

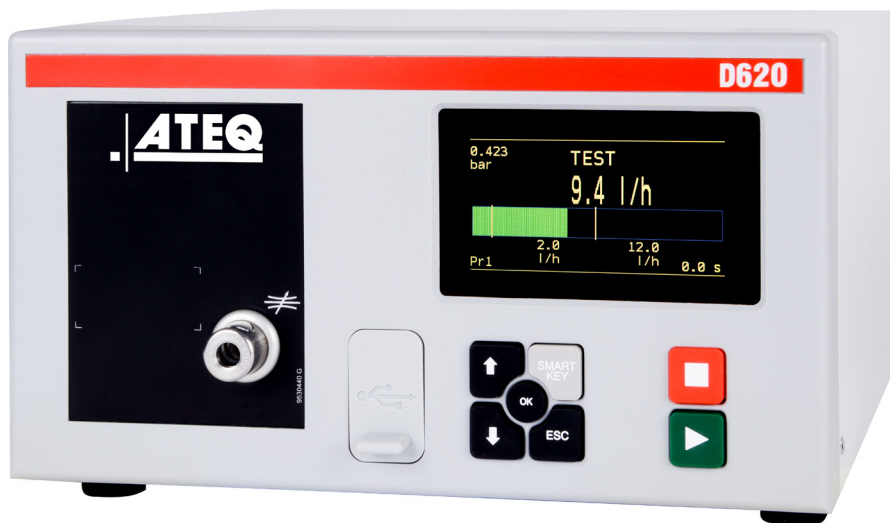

Applications



FLOW CONTROL

cookers, ovens, valve, gas taps, gas burners, lighters...



LEAK DETECTION

Valve seats, gear boxes, hydraulic components, motors,...



CONTROL

of aerosols, injectors...



D620

HIGH SPEED COMPACT FLOW TESTER

Measurement ranges

FLOW MEASUREMENT		
Range l/h	Accuracy	Max. resolution l/h
1	$\pm(2.5\%F + 0.001\text{l/h})$	0.0001
5	$\pm(2.5\%F + 0.005\text{l/h})$	0.0001
30	$\pm(2.5\%F + 0.03\text{l/h})$	0.001
80	$\pm(2.5\%F + 0.08\text{l/h})$	0.001
150	$\pm(2.5\%F + 0.15\text{l/h})$	0.01
500	$\pm(2.5\%F + 0.5\text{l/h})$	0.01
1.500	$\pm(2.5\%F + 1.5\text{l/h})$	0.1
4.000	$\pm(2.5\%F + 4\text{l/h})$	0.1
10.000	$\pm(2.5\%F + 10\text{l/h})$	1

F=Flow

Main features

- Flow measurement in direct or indirect testing
- Continuous measuring mode
- Wide flow measurement range
- USA, S.I. and customer units
- Measurement in standard or customised conditions
- Recalculated flow at the nominal pressure
- Measurement element fully integrated into one module
- 128 programs
- Mechanical or electronic regulator from vacuum to 10 bar
- setting on line (via USB)
- 2 languages (English + other one)
- Manual calibration on front panel with calibrated leak
- Data storage on internal memory or USB key

Environment

- ROHS standard

Flexible communication format

- RS232: Printer, modbus RTU
- Slave USB: PC supervision (WinAteq 300, sesame)
- Master USB: USB key to transfert (parameters, results, ...)
- Option Fieldbus: Profibus, devicenet, profinet, Ethernet/IP, Modbus RTU

Additional:

Time & date, language & units choice, test customisation & more...



D670
19"3U case




Pneumatic coupler



Master jet



TLC 600
Remote control

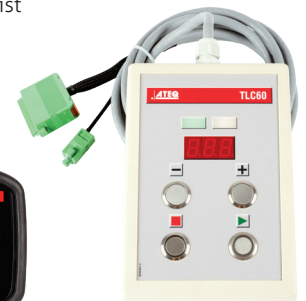

TLC 60
Remote control

Technical Specifications

Physical

Weight: 7 Kg
Dimensions: (WxHxD) 250x150x360 mm

Interface

Graphic color screen with simple and intuitive menu-driven operator controls
SMARTKEY: programmable key with user's functions

External electrical supply

24 VDC/2A or 100 - 240 VAC/50W

Air supply

Clean and dry air required
Air quality standard to be applied (ISO 8573-1)

Temperature

Operating: +5°C to +45°C
Storage: 0°C to +60°C

Option

- 9 inputs / 5 local outputs compatible with 5 series instruments
- 6 inputs/ 6 outputs 24 V programmable for external automation
- External capillary: closed to test port
- Electronic regulator
- Shut off / dumping / by-pass valve
- 2 pneumatic outputs for control of sealing connectors
- Memory card for archiving results (400 000)

Accessories

- Simple remote control TLC 60 connexion I/O
 - Advanced remote control TLC 600 connexion master USB
 - USB key for parameters access
 - Y valve
 - WinAteq 300 software
 - Leak calibrator
 - Master jets
 - Vacuum pump
 - Sealing connectors
- Please refer to ATEQ accessories list

